


ALFRA ROTABEST® – RB 130 B RL-E

RL-E-LINE

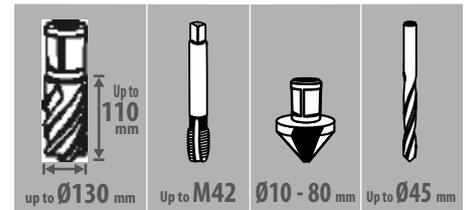

RB 130 B RL-E

Core drill dimensions	Ø 12.0 - 130.0 mm / Ø 20.0 - 50.0 mm (cutting depth 110 mm)
Cutting depth	50.0 mm / 110.0 mm
Twist drill	Up to Ø 45.0 mm with MT4 DIN 345 direct
Counterboring	Ø 10.0 - 80.0 mm
Tapping	with tapping attachment Up to M42
Arbors	MT4
Stroke	230 mm
Height adjustment	100 mm
4-speed gearbox	right / left 1. Step 30 - 80 rpm 2. Step 50 - 120 rpm 3. Step 130 - 350 rpm 4. Step 210 - 550 rpm
Power consumption	2,500 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Magnetic adhesion strength	33,000 N
Tool force (10 mm)	5,000 N
Magnetic base	90 x 400 mm
Weight	37.0 kg

Motor	
Right/left run	✓
Smooth start	✓
Oil bath gearbox	✓
Mech. Slip clutch	✓
Operation	
Soft-touch grips	✓
Ergonomic switch keyboard	✓
Magnet	
Metal rings	✓
Made in Germany	✓

Scope of delivery	
<ul style="list-style-type: none"> • Metal core drilling machine RB 130 B RL-E • Coolant device • Reduction sleeve MT4/3 • Transportation packing • Drill spray • Chip hook • Seat belt • Operating instructions 	

Prod.-No.

ALFRA Rotabest® RB 130 B RL-E	230 Volt	18647
ALFRA Rotabest® RB 130 B RL-E	110 Volt	18647.110