


# ALFRA ROTABEST® – RB 35 SP

**SP-LINE**



**MADE IN GERMANY**

Can be used with a permanent magnet from 3 mm material thickness

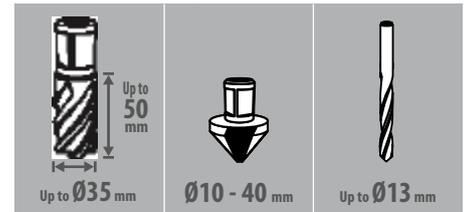

## RB 35 SP

Core drill dimensions	Ø 12.0 - 35.0 mm
Cutting depth	50.0 mm
Twist drill	Ø 1.0 - 13.0 mm
Counterboring	Ø 10.0 - 40.0 mm
Arbors	Quick-release chuck
Stroke	105 mm
Height adjustment	80 mm
Gearbox - on-load speed	450 rpm
Power consumption	1,100 W
Voltage	230 V 50/60 Hz 110 V 50/60 Hz
Tool Force (10 mm) / Magnetic adhesion force	2,800 N/17,000 N
Tool force (6 mm S235)	2,300 N
Magnetic base	72 x 190 mm
Weight	9.9 kg

<b>Motor</b>	
Smooth start	✓
Hybrid relay	✓
Overload protection	✓
Motor emergency stop	✓

<b>Slide</b>	
Infinitely adjustable	✓
Self-adjusting guide	✓

<b>Operation</b>	
Soft-touch grips	✓
Membrane keyboard	✓
Holder for Allen key	✓
Cable length 5 m	✓

<b>Magnet</b>	
Sensor/LED	✓
Metal rings	✓
Performance and weight optimisation	✓

Made in Germany	✓
-----------------	---

<b>Scope of delivery</b>	
<ul style="list-style-type: none"> <li>• Metal core drilling machine RB 35 SP with quick-release chuck</li> <li>• Carrying case</li> <li>• Seat belt</li> <li>• Coolant device</li> <li>• Operating Instructions</li> <li>• <b>incl. 1 core drill free</b></li> </ul>	

## Prod.-No.

ALFRA Rotabest® RB 35 SP	230 Volt	18801
ALFRA Rotabest® RB 35 SP	110 Volt	18801.110