



The all-purpose-weapon:

ALFRA ROTABEST® HSS-CO-ECO Core drill WELDON

- With Weldon shank 19.0 mm, 2 driving surfaces
- Internal bore: 6.35 mm
- Steel quality: Special super high speed steel
- Polished section: with pre- and post-cutter

Suitable on:

ALFRA Rotabest®, BDS, Bux, Ruko, Magnetor, Euroboor, Universal, Nitto, Jancy, Hougen, Magtron, Promac, Rotabroach and all other magnetic drills with Weldon shank.

Cutting depth

Ø in mm	Cutting depth	
	30 mm Prod.-No.	50 mm Prod.-No.
12.0	1901012025	1901012050
13.0	1901013025	1901013050
13.5	1901013525	1901013550
14.0	1901014025	1901014050
15.0	1901015025	1901015050
15.5	1901015525	1901015550
16.0	1901016025	1901016050
17.0	1901017025	1901017050
17.5	1901017525	1901017550
18.0	1901018025	1901018050
19.0	1901019025	1901019050
19.5	1901019525	1901019550
20.0	1901020025	1901020050
21.0	1901021025	1901021050
22.0	1901022025	1901022050
23.0	1901023025	1901023050
24.0	1901024025	1901024050
25.0	1901025025	1901025050
26.0	1901026025	1901026050
26.5	1901026525	1901026550
27.0	1901027025	1901027050
28.0	1901028025	1901028050
29.0	1901029025	1901029050
30.0	1901030025	1901030050
31.0	1901031025	1901031050
32.0	1901032025	1901032050
33.0	1901033025	1901033050
34.0	1901034025	1901034050
35.0	1901035025	1901035050
36.0	1901036025	1901036050
37.0	1901037025	1901037050
38.0	1901038025	1901038050
39.0	1901039025	1901039050
40.0	1901040025	1901040050
41.0	1901041025	1901041050
42.0	1901042025	1901042050
43.0	1901043025	1901043050
44.0	1901044025	1901044050
45.0	1901045025	1901045050
46.0	1901046025	1901046050
47.0	1901047025	1901047050
48.0	1901048025	1901048050
49.0	1901049025	1901049050
50.0	1901050025	1901050050
51.0	-	1901051050
52.0	1901052025	1901052050
53.0	-	1901053050
54.0	-	1901054050
55.0	1901055025	1901055050
56.0	-	1901056050
57.0	-	1901057050
58.0	-	1901058050
59.0	-	1901059050
60.0	1901060025	1901060050

Cutting depth

Ø in mm	Cutting depth
	110 mm Prod.-No.*
20.0	1901020110
22.0	1901022110
24.0	1901024110
25.0	1901025110
26.0	1901026110
28.0	1901028110
30.0	1901030110
32.0	1901032110
35.0	1901035110
40.0	1901040110
45.0	1901045110
50.0	1901050110


* Caution: HSS-Co Eco core drill cutting depth 110 mm can only be used with tool holder AMT 2 L (Prod.-No. 18003 L) or AMT 3 L (Prod.-No. 18025 L).

Ejector pin at cutting depth

30 mm Prod.-No.	50 mm Prod.-No.	110 mm Prod.-No.*
1926500 (6.35 x 77 mm)	1950500 (6.35 x 102 mm)	2001502 (6.35 x 160 mm)



Weldon

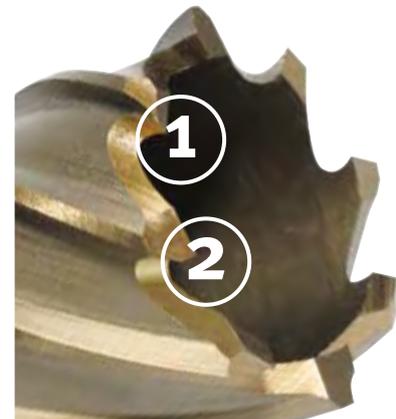

Heavy duty serration with pre- (1) and post-cutter (2)