

LIFTING MAGNET TML 90 R

R With prism for pipes and curved surfaces
Lifts pipes 25 mm (1") to 200 mm (7-7/8") in diameter


- 1 Only 1.8 kg (4 lbs) dead weight
- 2 Max. load-bearing capacity: 100 kg (220 lbs) (with 3:1 safety factor)
- 3 360° rotatable and 180° pivotable load swivel
- 4 Easy one-handed operation



- Lifts pipes from 25 mm (1") to 200 mm (7-7/8") in diameter
- Outstanding performance on thin-walled materials (operable from just 1 mm; 1/32")
- 360° rotatable and 180° pivotable load swivel – even under full load
- Wear-resistant magnetic contact area made of hardened steel with TiN-coating preventing damages and guaranteeing a long lifetime

Technical data TML 90 R:

- Dead weight: 1.8 kg (4 lbs)
- Breakaway force: > 270 kg (595 lbs) on 6 mm (1/4") steel S 235
- Max. load-bearing capacity with round pipes: 20 - 50 % of the load-bearing capacity on flat material (see TML 100), depending on pipe diameter and material thickness
- Length: 82.5 mm (3-1/4"); width: 80 mm (3-1/8");
(incl. lever: length 190 mm; 7-1/2", width 124 mm; 4-7/8")
height (load swivel in horizontal position): 88 mm (3-7/16")
height (load swivel in vertical position): 150 mm (5-15/16")

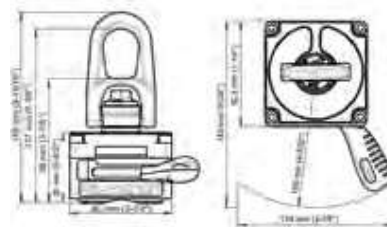

▶ VIDEO

Prod.-No.

ALFRA TML 90 R

41100.L.R